



Europäisches
Patentamt

European
Patent Office

Rec'd PC 10
Office européen
des brevets

PCT/EP 06/032289
10/509399

24 SEP 2004

#2

REC'D 14 MAY 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02076189.6

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:
Application no.: 02076189.6
Demande no:

Anmeldetag:
Date of filing: 26.03.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

SHELL INTERNATIONALE RESEARCH
MAATSCHAPPIJ B.V.
Carel van Bylandtlaan 30
2596 HR Den Haag
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Filter assembly comprising filter elements and a filter grid

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

B01D/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE TR

TS 9118 EPC

Crw

FILTER ASSEMBLY COMPRISING FILTER ELEMENTS AND A FILTER
GRID

The invention pertains to a filter assembly comprising a plurality of longitudinal elongated filter elements that are suitable for separating fluid from solid particles, having an open upper end sealed into a
5 sealing device and a closed bottom end attached to a filter support that is mounted on a filter grid. The invention further pertains to said filter grid and to a filter vessel comprising the filter assembly.

More particularly, the present invention relates to
10 an apparatus for filtering solid particles from a fluid containing solid particles. In many industrial processes, particularly elevated at high temperature or at high pressure, fluids are produced containing quantities of solid particles which must be removed before the fluids
15 may be used, treated further, or released. For example, the ordinary combustion of coal produces an effluent gas containing flyash particles, which cannot be released to the atmosphere. Similarly, the gasification or partial oxidation of coal often produces a product gas stream
20 which, after bulk removal of solids, contains from 0.1 percent to 4.0 percent by weight, based on the total weight of the gas and solids, of various solid particles which comprise flyslag or flyash and, in some cases, unburned coal. Again, fluid catalytic processes often
25 produce gas or liquid streams containing residual catalyst "fines" which cannot be allowed to contaminate either the product or the environment.

EPO - DG 1

26.03.2002

To overcome this difficulty, a variety of treatment procedures may be used. For example, the residual solids-containing fluid may be passed continuously or intermittently through a filter or bank of discrete filter units. Intermittently, the filter(s) are cleaned or purged so that they do not become totally clogged. For example, the filter(s) may be subjected to a back-flush of gas or liquid, the particles removed being allowed to collect in the bottom of the filter vessel for continuous or periodic removal. Sonic, ultrasonic, or subsonic removal may also be employed, as has been described in for example EP-A-551951.

A problem common to many filtration systems is the possibility of failure of the filter element/seal or one or more filter elements/seals in a bank or sealing device thereof. In EP-A-601733 a solution was proposed for better sealing the filter elements when these are of a ceramic type, typically for candle filters.

Sealing problems are further increased because of swivel movements of the filter elements, for instance as a consequence of pressure fluctuations during back-flush procedures. Swivel motions of the filter elements further may lead to damage or fracture of the filter elements, since these filter elements are preferably closely located to each other. A solution for this problem was proposed in WO 87/07180 wherein the filter elements were provided with a blind hole at their bottom end, which fitted in a pin-shaped limiting element. The pin-shaped elements are mounted on a holder device that is not described further, other than in the Figure. The pin-shaped element can be provided with an elastic cap, allowing moderate swivel motion with avoiding damaging of filter elements by the pin-shaped element. This device

proved to be a good solution for avoiding damage, but in
term of efficient operation this device appears to be
disappointing. The main problem resides in the fact that
substantial amounts of solid material in the form of slug
5 or clumps clog the holder device comprising the pin-
shaped elements in such a serious manner that useful
operation is only possible after regular and manifold
cleaning. Furthermore, clogging diminished the effective
surface of the filter elements and may lead to fracture
10 of said filter elements. Practically and economically
this situation is very undesired.

A need has existed, therefore, for a filter
arrangement, which continues its operation for a
sufficient long process time with avoiding damaging
15 failure of one or more filter elements. The present
invention satisfies this need, overcoming the problem of
clogging in a novel and efficient manner.

It is an object of the invention to provide a filter
assembly, a filter vessel comprising a longitudinal
20 vessel body having upper and lower ends; a master tube
sheet separating the area of the vessel body containing
fluid and the area containing fluid and solid particles;
at least one inlet port in said vessel body for admitting
fluid to be filtered from solid particles; outlet ports
25 in said vessel for discharging the fluid and for
discharging the solid particles and said filter assembly,
and at least one filter grid that is used in said filter
assembly. To this end the invention pertains to a filter
assembly comprising a filter grid, characterized in that
30 the filter grid has a plurality of grid elements together
forming the filter grid, wherein at least a portion of
the cross-section of the grid elements between two
adjacent filter elements is pointiform. The point of the

grid elements are directed in the opposite direction of the gravitational force in order to prevent piling up of solid material onto the grid elements. The filter assembly is used for separating a fluid and solid particles, preferably solid particles with an angle of repose between 30 and 90°, more particularly between 40 and 70°. Solid particles having such an angle of repose is for example flyash. The angle of repose is the slope shown when a powder is dumped freely in a heap on a horizontal plane as described on pages 53-56 of "The dynamics of fine powders", K. Rietema, 1991, Elsevier Science Publishers Ltd. The filter vessel according to the present invention is particularly useful in the purification of flyash from syngas. Syngas, which mainly comprises carbon monoxide, hydrogen, nitrogen, carbon dioxide, and water, is a common gas that is obtained in coal gasification processes. The filter vessel of the invention can be used as a unit in a coal gasification plant for producing cooled purified syngas. The syngas may suitably be used as quenching gas in the gasifier itself. Preferably it is further processed in gas treating processes for removal of sulfur components before it is used in preferably chemical or power applications. Examples of chemical applications are the preparation of ammonia and methanol and as feedstock for Fischer-Tropsch processes. The flyash may be used as a binder in construction materials such as ceramic materials.

The invention is further explained in the following, not restricting, Figures.

Fig. 1 shows a filter vessel with a sealing device, a master tube sheet; a filter element, a filter support, and a filter grid.

Fig. 2 shows a top view of a filter grid.

Fig. 3 shows a cross-sectional view along line A-A.

Fig. 4 shows a cross-sectional view of a grid element along line B-B.

5 In Fig. 1 a longitudinal vessel body 1 having upper
end 2 and lower end 3, inlet port 4 in said vessel body
for admitting fluid to be filtered from solid particles,
outlet ports in said vessel for discharging the fluid 5
and for discharging the solid particles 6. The vessel
10 contains a master tube sheet 18 separating the area of
the vessel body 1 containing fluid and the area
containing fluid and solid particles. The vessel further
contains a plurality of filter elements 7 (for clarity
only four filter element have been depicted), provided
15 with backflushing means 9. The filter elements 7 can be
made of porous ceramic or porous metallic materials. The
lower ends of the filter elements 7 are attached to a
filter support 10, which is comprised in the filter grid
11. The vessel 1 may contain one filter grid 11 with
20 filter elements 7, but usually the vessel 1 contains a
plurality of filter grids 11, for instance 6 to 24 filter
grids placed in the vessel body 1, each with for example
between 30-50 filter elements 7.

25 In Fig. 2 a specific embodiment of a filter grid is
shown. The grid is composed of grid elements 12. Each
form that fits in the filter vessel can be used. In this
example the form is hexagonal, comprising 18 grid
elements 12. According to the conformation of this
example a total of 52 intersection points 13 are
30 obtained, 4 of which are used as anchoring points 14 for
fixing the grid to for example the master tube sheet 18
via supports 8 or directly in the filter vessel. In this
example all other point of intersection 13 are provided

with a filter support 10, which in this example has the form of a pin-like extension. Of course, at one or more of the point of intersection 13 the filter support 13 can be deleted. It is preferred that more than 90% of the points of intersection 13 of grid elements 12 are accommodated with a filter support 10.

In this embodiment openings of the form of a parallelogram are obtained with four points of intersection 13 as the corner points. A space around the point of intersection of the size of the cross-section of a filter element (7) will be occupied by said filter element 7 when it is placed onto or in the filter support 10. The ratio of the total area of the horizontal cross-section at the maximum thickness of the grid elements 12 (which is shown in the top view of Fig. 2): the total area of open parts 15 of the filter grid 11 is less than 1:1.5, preferably 1:(1.5-15), and more preferably 1:(3.5-5). This ratio is of importance to prevent the open parts 15 from clogging. The size of the open parts is usually at least 7 times, preferably 9 to 12 times, larger than the size of the particles or the clumps of particles that must pass these open parts 15. The pin-shaped element 10 or the recess of the filter element 7 in which pin-shaped element 10 fits, may be provided with an elastic cap as described in WO 87/07180.

In Fig. 3 a cross-section along line A-A of Fig. 2 shows the points of intersection 13, the grid elements 12, and a pin-like extension 10 (filter support) that is fitted in a hole or recess 16 provided on the point of intersection 13.

In Fig. 4 a cross-sectional view is given of a grid element 12. The grid element has a point 17, the angle τ of which is equal or smaller than $2 \cdot (90 - \alpha)$ and the angles

τ_1 and τ_2 of each of the edges of said point with a perpendicular line 19 are smaller than $(90-\alpha)$, wherein α stands for the angle of repose of the solid particles. In Fig. 4 angle τ is about 30° and the angles τ_1 and τ_2 are each about 15° , which makes this embodiment suitable for separating solid particles with an angle of repose of 75° or less. These angles are necessary to avoid accumulation of solid material on the grid elements 12. When solid material accumulates it may finally form a contact between to filter elements 7, thereby increasing the danger of damage or fracture thereof. The thickness d of the grid element 12 is the maximum thickness of said grid element 12. This thickness is preferably as small as possible, but the thickness must be sufficient to secure the rigidity of the filter grid 11. Preferably, the grid elements 12 are smoothened, for instance by polishing, to further improve its property of avoiding accumulation of solid material on the grid elements 12.

C L A I M S

1. Filter assembly comprising a plurality of longitudinal elongated filter elements (7) that are suitable for separating fluid from solid particles, having an open upper end (2) sealed into a sealing device
5 (8) and a closed bottom end attached to a filter support (10) that is mounted on a filter grid (11), characterized in that the filter grid (11) has a plurality of grid elements (12) together forming the filter grid (11), wherein at least a portion of the cross-section of the
10 grid elements (12) between two adjacent filter elements (7) is pointiform.

2. The filter assembly of claim 1 wherein the cross-section of the grid element (12) is pointiform over at least the total portion of the grid element (12) between
15 the filter elements (7).

3. The filter assembly of claim 1 or 2 wherein the point (17) of the cross-section of the grid element (12) has an angle $\tau \leq 2 \cdot (90 - \alpha)$, and the angles τ_1 and τ_2 of each of the edges of said point (17) with a perpendicular line
20 (19) are $\leq (90 - \alpha)$, wherein α stands for the angle of repose of the solid particles.

4. The filter assembly of any one of claims 1-3 wherein the filter elements (7) are at least substantially vertically mounted.

25 5. The filter assembly of any one of claims 1-4 wherein the surface of the grid element (12) is smoothened.

6. The filter assembly of any one of claims 1-5 wherein the filter support (10) is a longitudinal elongated

EPO - DG 1

26.03.2002

extension that fits into a recess provided in the filter element (7).

7. The filter assembly of any one of claims 1-6 wherein the filter support (10) is placed on a point of intersection (13) of at least two grid elements (12).

8. The filter assembly of any one of claims 1-7 wherein the ratio of the total area of the horizontal cross-section at the maximum thickness of the grid elements (12):the total area of open parts (15) of the filter grid (11) is less than 1:1.5.

9. The filter assembly of claim 8 wherein the ratio of the total area of the horizontal cross-section at the maximum thickness of the grid elements (12):the total area of open parts (15) of the filter grid (11) is between 1:3.5 and 1:5.

10. Filter grid (11) for accommodating a plurality of filter elements (7) that are suitable for separating fluid from solid particles, comprising filter supports (10), preferably longitudinal elongated extensions that fit into a recess provided in the filter elements (7), characterized in that at least a portion of the cross-section of the grid elements (12) between two adjacent filter elements (7) is pointiform.

11. A filter vessel comprising:

- a longitudinal vessel body (1) having upper (2) and lower ends (3);
- a master tube sheet (18) separating the area of the vessel body (1) containing fluid and the area containing fluid and solid particles;
- at least one inlet port (4) in said vessel body (1) for admitting fluid to be filtered from solid particles;
- outlet ports (5,6) in said vessel for discharging the fluid and for discharging the solid particles;

- at least one filter assembly of any one of claims 1-9.

A B S T R A C T

FILTER ASSEMBLY COMPRISING FILTER ELEMENTS AND A FILTER
GRID


The invention pertains to a filter assembly comprising a plurality, preferably at least substantially vertically mounted, longitudinal elongated filter elements that are suitable for separating fluid from solid particles, having an open upper end sealed into a sealing device and a closed bottom end attached to a filter support that is mounted on a filter grid, characterized in that the filter grid has a plurality of grid elements together forming a grid, wherein at least a portion of the cross-section of the grid elements between two adjacent filter elements is pointiform. The invention further pertains to a filter grid and a filter vessel containing at least one filter assembly.

EPO - DG 1

26.03.1972

(102)

FIG. 1

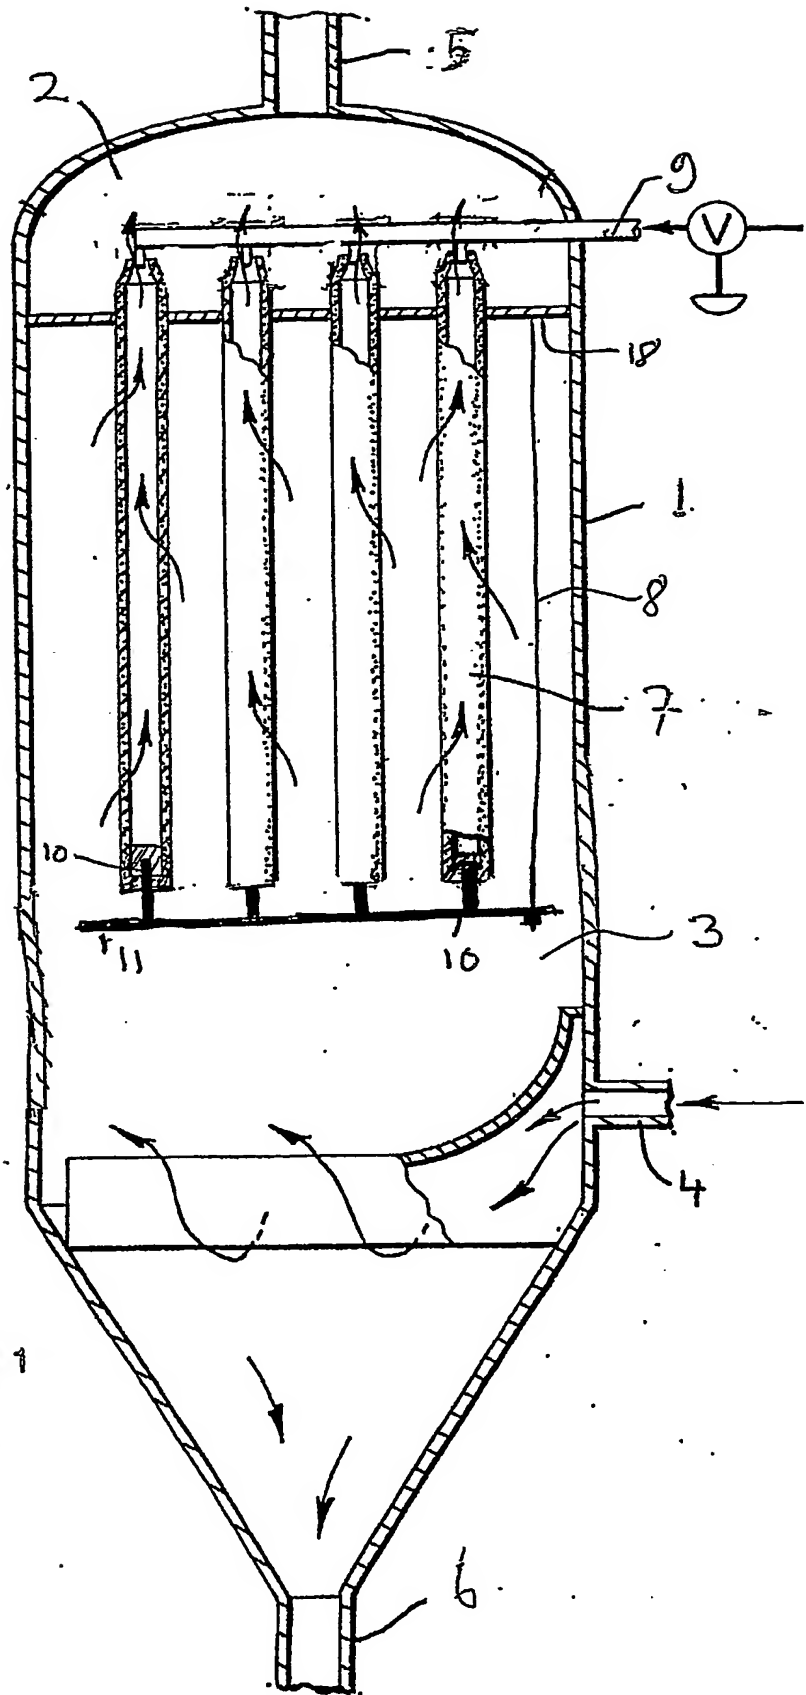

EPO - DG 1

26. 03. 2002

(102)

Fig. 3



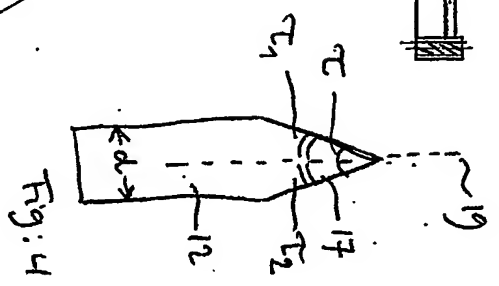


Fig. 4

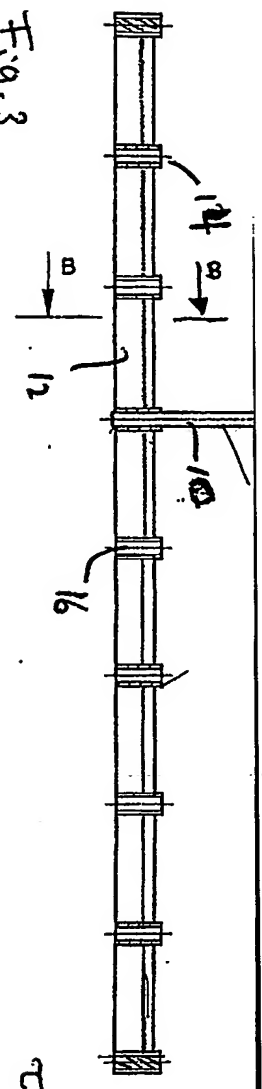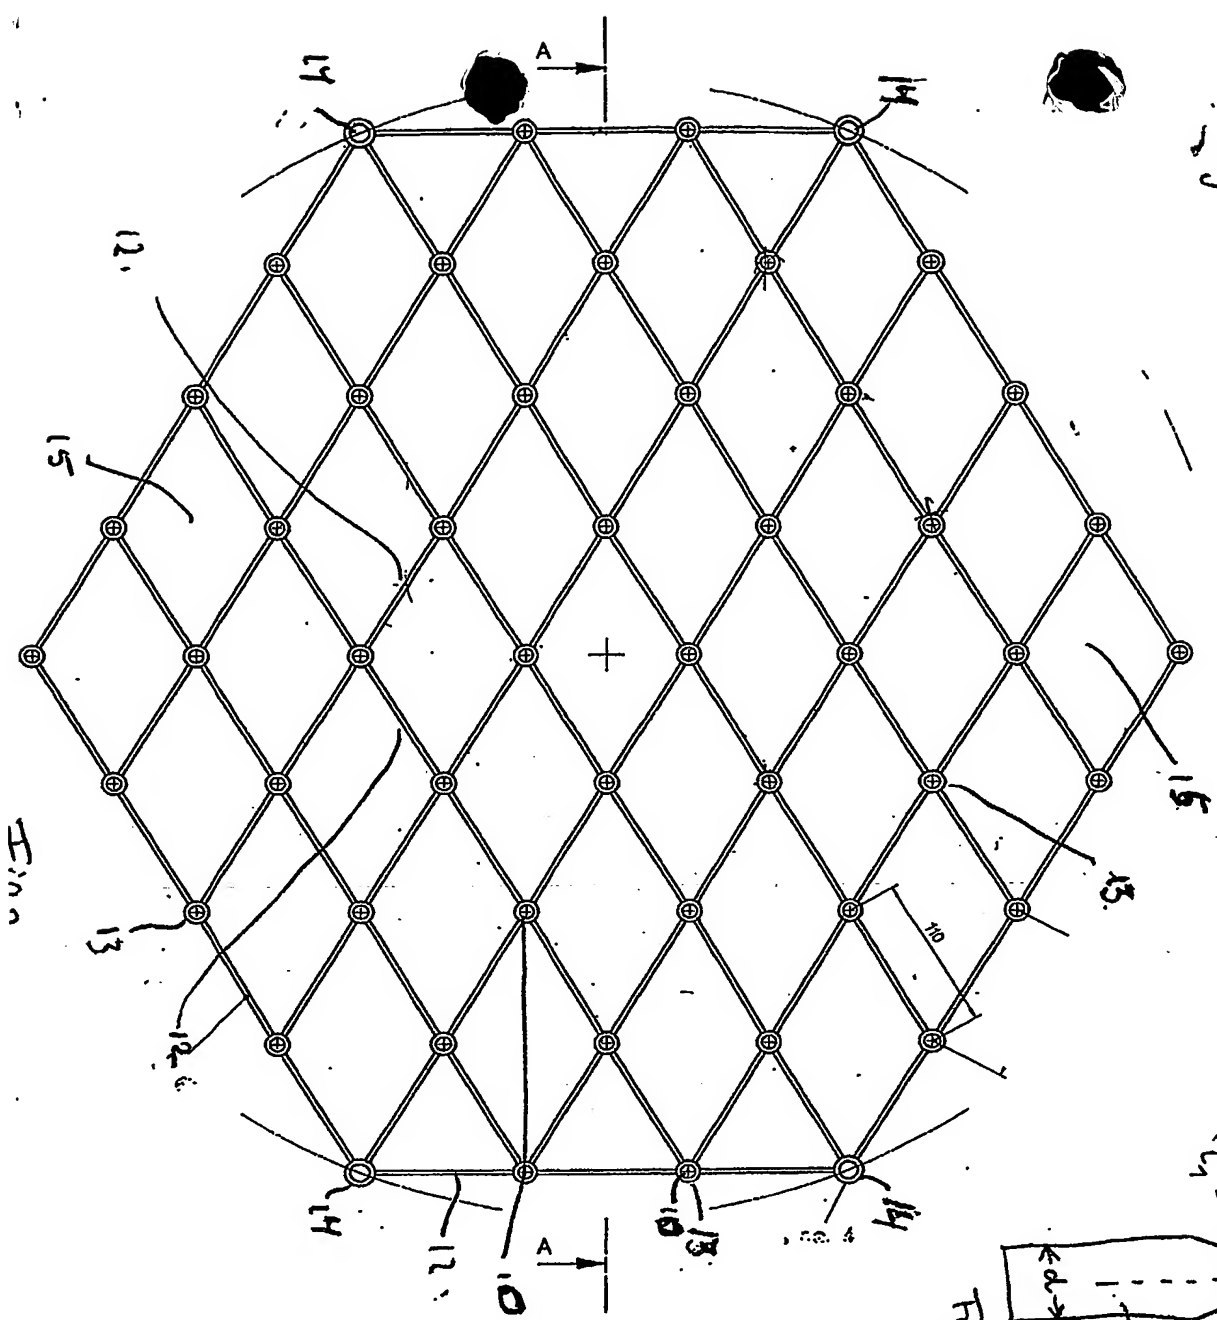

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.